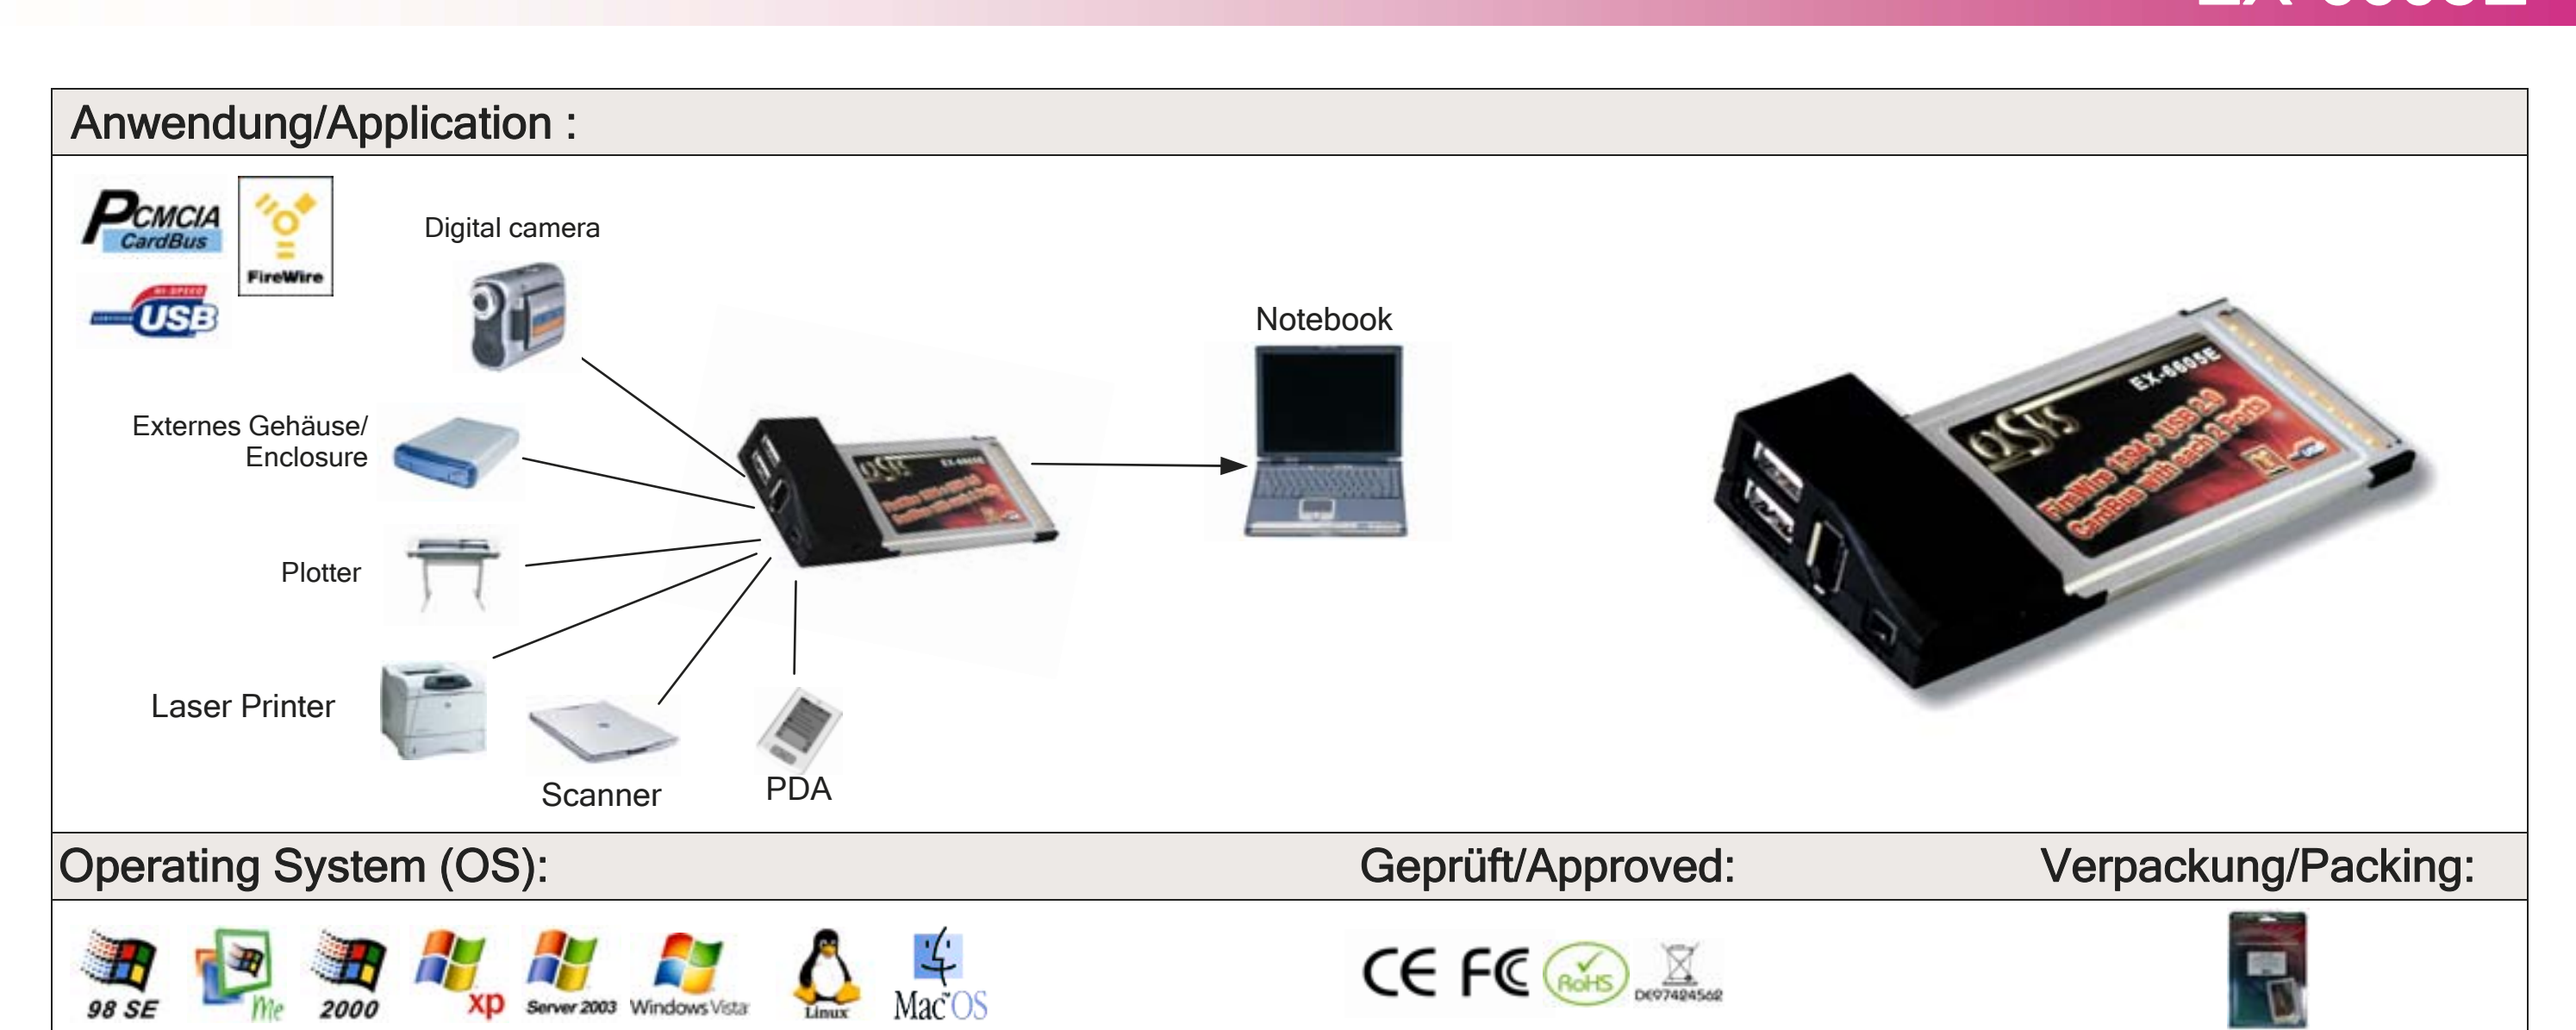


Operating System (OS): 98 SE, Me, 2000, XP, Server 2003, Windows Vista, Linux, Mac OS

Geprüft/Approved: CE, FC, RoHS

Verpackung/Packing:

PCMCIA FireWire 1394a und USB 2.0

Beschreibung :	• Die EX-6605E 1394a (FireWire400) und USB 2.0 PCMCIA ist eine Zusatzkarte für den PCMCIA Bus um das Notebook mit zusätzlichen zwei FireWire 1394a und zwei USB 2.0 Ports zu erweitern. Somit können weitere 1394a und USB 2.0 Geräte an das Notebook angeschlossen werden.
Merkmale FireWire 1394a: Merkmale USB 2.0:	• PCMCIA 32-Bit FireWire IEEE 1394 CardBus mit zwei Anschlüssen • Unterstützt bis 63 Peripheriegeräte • PCMCIA USB 2.0 CardBus mit zwei Anschlüssen • Integrierter Dual-Speed USB Transceivers • Unterstützt alle USB 1.1 bis 2.0 kompatiblen Peripheriegeräte
Chip-Set :	• Texas Instruments TI OHCI-Lynx und NEC
Datentransfer-Rate :	• FireWire 1394A: bis 400Mbps / USB 2.0: bis 480Mbps
Anschlüsse :	• 2 x USB 2.0 A-Buchse • 1 x 4 Pin und 6 Pin FireWire 1394a Buchsen
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55°C • 5 bis 95%
Hardwaresysteme :	• PCMCIA CardBus 32-Bit
Abmessung / Gewicht :	• 117 x 54mm / 350g
Lieferumfang :	• EX-6605E, Handbuch

PCMCIA FireWire 1394a and USB 2.0

Description:	• The EX-6605E 1394a (FireWire400) and USB 2.0 PCMCIA provides a reliable solution for Notebook computers to connect to FireWire 1394a and USB 2.0 peripherals over the PCMCIA Slots.
Feature FireWire 1394a: Feature USB 2.0:	• PCMCIA with two FireWire 1394a ports • Support up to 63 devices • PCMCIA USB 2.0 CardBus with two ports • Integer dual-speed USB transceivers • Support all USB 1.1 to 2.0 compatible peripheral devices
Chip-Set :	• Texas Instruments TI OHCI-Lynx and NEC
Data transfer rate :	• FireWire 1394A: up to 400Mbps / USB 2.0: up to 480Mbps
Connectors :	• 2 x USB 2.0 female • 1 x 4 pin and 6 pin FireWire 1394a female
Operating Temperature : Operating Humidity :	• 0 up to 55°C • 5 up to 95%
Hardware system :	• PCMCIA CardBus 32-Bit
Size / Weight :	• 117 x 54mm / 350g
Packaging contents :	• EX-6605E, Manual